



"Out Shines All Others"

## STEADY STATE IR SOURCE Model EK-8522

Helioworks offers a unique steady state infrared emitter for the mid IR spectrum that operates at up to 950°C (1223°K) in an industry standard TO-8 package. The calcium fluoride (CaF<sub>2</sub>) window provides spectral transmission to over 9 microns.




### Key features include:

- Kanthal Filament with Emissivity of 0.7
- Calcium Fluoride (CaF<sub>2</sub>) Window
- Internal Gold Plated Parabolic Reflector
- Standard TO-8 Package
- Inert Gas Backfill

### Electrical Specifications:

Peak Voltage = 3.0 Volts DC MAXIMUM  
Peak Current = 1.48 Amps  
Peak Power = 4.4 Watts

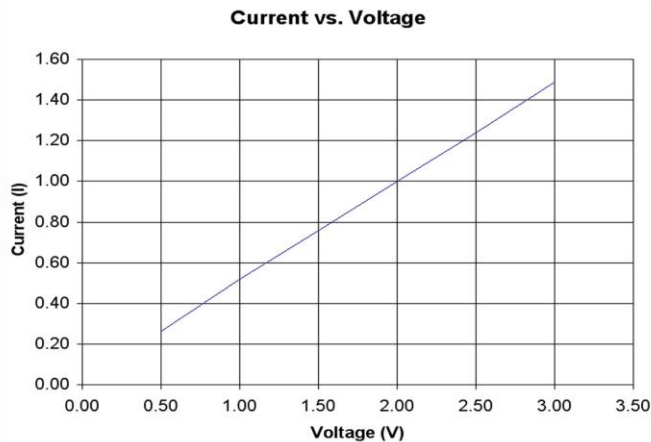


V	I	W=VI	R=V/I
0.50	0.26	0.13	1.90
1.00	0.52	0.52	1.92
1.50	0.76	1.14	1.97
2.00	1.00	2.00	2.00
2.50	1.24	3.10	2.02
2.80	1.39	3.89	2.01
3.00	1.49	4.47	2.01

Approximate 950° C

### **Radiance (W/CM<sup>2</sup>):**

Volts = 3.0, Distance = 3.0 inches from source

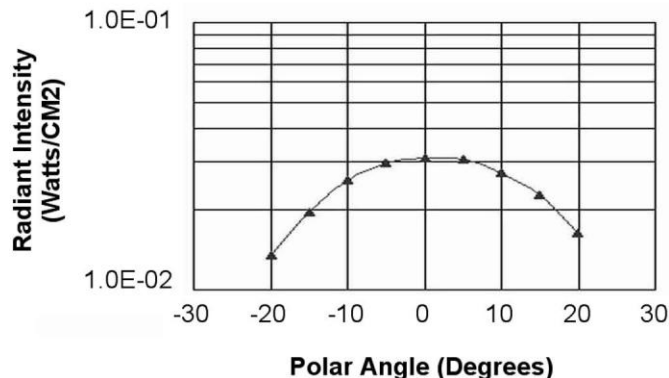

Polar Angle	Average (Watts/CM <sup>2</sup> )
-20	1.35E-02
-15	1.95E-02
-10	2.58E-02
-5	2.98E-02
0	3.10E-02
5	3.09E-02
10	2.75E-02
15	2.28E-02
20	1.63E-02