



"Out Shines All Others"

PULSABLE IR SOURCE

Model EP-3872*

Helioworks, Inc. offers a unique steady state infrared emitter with a tungsten filament and sapphire window that provides mid IR radiation to over 5 microns. It operates in pulsed or steady state mode at temperatures in excess of 1900° K in an industry standard TO-8 package.



Key features include:

- Tungsten Filament
- Operates in Pulsed or Steady State Mode
- Internal Gold Plated Parabolic Reflector
- Sapphire Window
- Standard TO-8 Package




Electrical Specifications:

Peak Voltage = 2.2 Volts MAXIMUM

Peak Current = 1.1 Amps

Peak Power = 2.4 Watts

*Patented

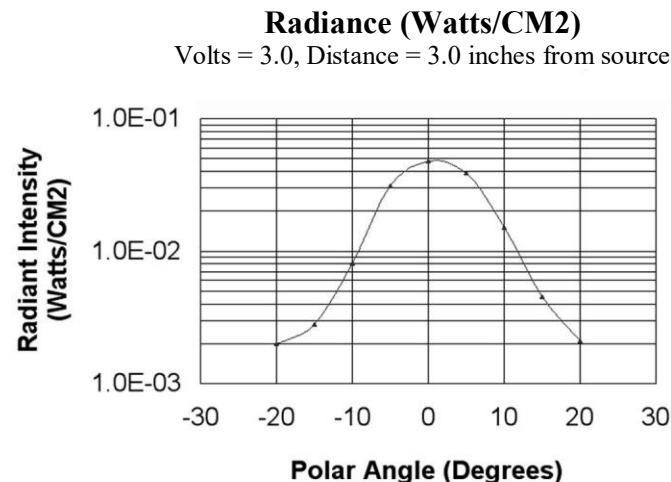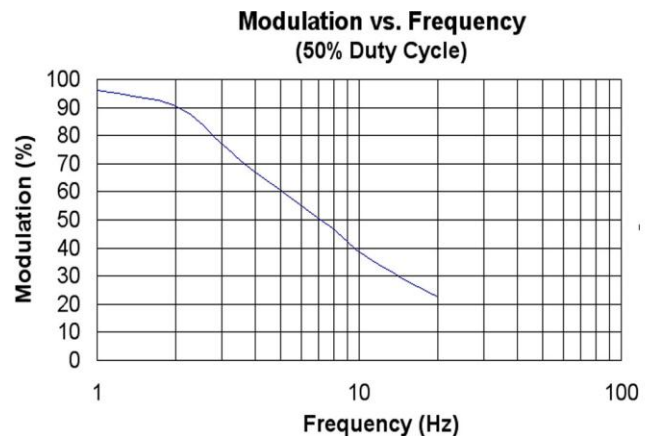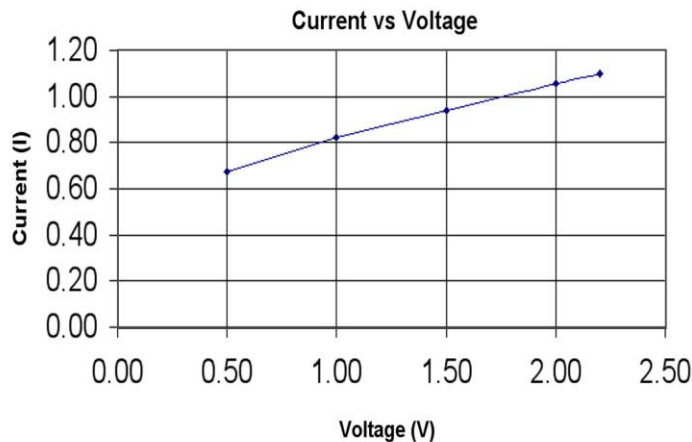

Polar Angle	Average (Watts/CM2)
-20	2.00E-03
-15	2.80E-03
-10	8.00E-03
-5	3.10E-02
0	4.75E-02
5	3.90E-02
10	1.50E-02
15	4.50E-03
20	2.10E-03

아이티비코퍼레이션

전화: 02-549-8501 팩스: 02-549-8502 전자우편: sales@itbco.co.kr 홈페이지: www.itbco.co.kr